


**Battery Connections**

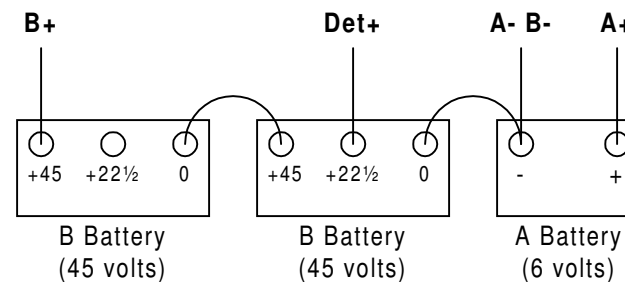

**Notes:**

- 1) A 200A may be used for the Detector (D).
- 2) This radio uses A-suffix tubes with 5 volt 1/4 amp filaments. Non-suffix (1 amp) tubes cannot be used.
- 3) There is a question as to whether the rheostat in the #4500 tube unit was originally 4 ohms or 10 ohms.

This schematic is 11" x 17"

**PRELIMINARY**  
The information presented is believed to be correct. However, it is subject to revision at any time.

A	09 May 2007	Original
REV	DATE	DESCRIPTION
REVISIONS		

This schematic covers models: 10A 4550 10A 4560		<b>W3NLB</b>		(c) 2005-2007 W3NLB All Rights Reserved	
<b>Atwater Kent Model 10C 4700</b>					
<b>Schematic and Wiring Diagram</b>					
Drawn by:	Leigh Bassett W3NLB	FSCM NO	DWG NO	REV	A
Date:	09 May 2007	SCALE	AK04550SCH	SHEET	1 OF 1